


EXTRUDER-EXTRUSION BLOW GRANULE MOLDING MACHINE

Main Driver:
VFA7

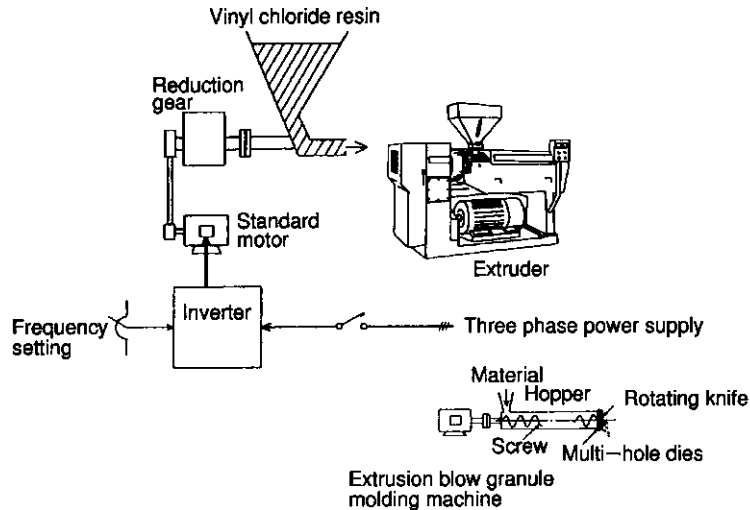

An example of an extruder for vinyl chloride resin. Conventionally, a DC motor or a motor with an eddy current coupling has been used. Introduction of an inverter, however, enables reduction of machine size and easier maintenance.

Advantages of adopting an inverter

1. Enables operation combined with a standard motor.
2. **Maintenance is not required.**

Note on application

1. When inverter drive within low speed range, VF motor (constant torque motor for inverter) shall be used.